

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
20 June 2002 (20.06.2002)


PCT

(10) International Publication Number
WO 02/48431 A2

- (51) International Patent Classification: C25B 15/00, 9/06, 1/13
- (71) Applicant (for all designated States except US): LYN-TECH INTERNATIONAL, LTD. [US/US]; 7610 Eastmark Drive, College Station, TX 77845 (US).
- (21) International Application Number: PCT/US01/48346
- (72) Inventors; and
- (73) Inventors/Applicants (for US only): ANDREWS, Craig, C. [US/US]; 1106 Walton, College Station, TX 77840 (US). MURPHY, Oliver [IE/US]; 4213 Meadowbrook, Bryan, TX 77802 (US). BOYD, Brian [US/US]; 4325 Silverview Court, Fort Collins, CO 80525 (US).
- (22) International Filing Date: 12 December 2001 (12.12.2001)
- (74) Agent: STREETS, Jeffrey, L.; Streets & Steele, Suite 355, 13831 Northwest Freeway, Houston, TX 77040 (US).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|------------|-------------------------------|----|
| 60/254,820 | 12 December 2000 (12.12.2000) | US |
| 60/261,101 | 10 January 2001 (10.01.2001) | US |
| 60/261,534 | 12 January 2001 (12.01.2001) | US |
| 60/317,562 | 5 September 2001 (05.09.2001) | US |
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,

(Continued on next page)

(54) Title: ELECTROCHEMICAL APPARATUS WITH RETRACTABLE ELECTRODE

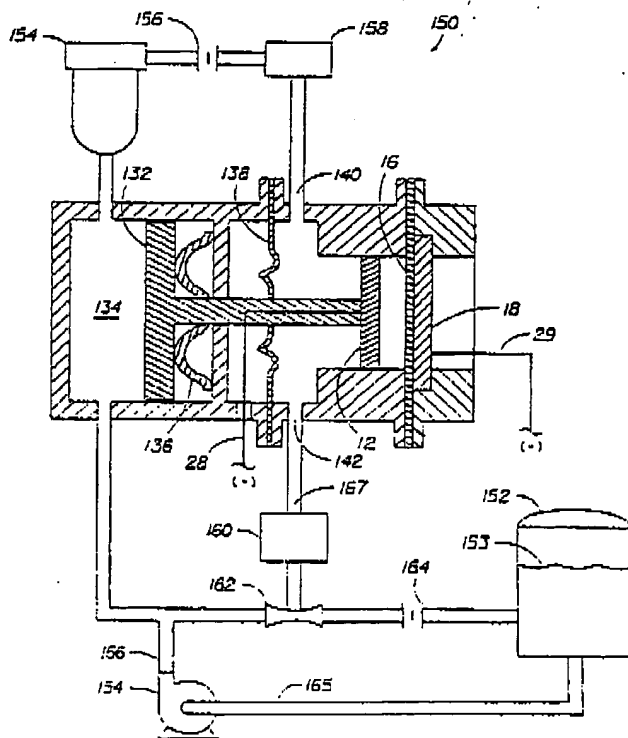

(57) Abstract: Electrochemical apparatus and methods that support periodic, non-steady state, or discontinuous operation without suffering degradation of materials or loss of efficiency. The invention provides a means for positioning one or more electrodes into contact with electrolyte and means for retracting the one or more electrodes out of contact with the electrolyte. The means for positioning and means for retracting may be the same device or different devices. The means for positioning and means for retracting may be designed to provide automatic, passive, or fail-safe retraction of the electrode upon a given standby condition, such as a voltage of less than one Volt being applied between the first and second electrodes, expiration of a time period, an ozone concentration greater than a set point ozone concentration, contact pressure of less than 5 psig, and combinations thereof.

WO 02/48431 A2

WO 02/48431 A2~~1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657~~

WO 02/48431

PCT/US01/48346

**ELECTROCHEMICAL APPARATUS
WITH RETRACTABLE ELECTRODE**

BACKGROUND OF THE INVENTION

5 Field of the Invention

This invention relates to an electrochemical apparatus capable of periodic operation without suffering long-term loss of efficiency or degradation of materials, in particular electrocatalyst layers or coatings.

Background of the Related Art

10 Ozone is known to be a powerful oxidizing species. Numerous methods and apparatus have been used to generate ozone and use ozone. However, many potential applications for the use of ozone do not require, or cannot utilize, a continuous stream of ozone gas or ozonated water. Unfortunately, the generation and use of ozone in discontinuous, unsteady-state, or batch
15 modes of operation can be problematic for a variety of reasons. First, the high reactivity and rapid decomposition of ozone necessitate that the ozone be generated just prior to utilization. This dictates that ozone-generating capacity must closely match the peak rate of consumption. Second, the need to generate highly concentrated ozone favors electrochemical processes, most preferably using a lead dioxide anodic electrocatalyst.

20 While lead dioxide (PbO_2) is generally unstable in aqueous acid solutions, the potential-pH equilibrium diagram for lead-water at 25°C in Figure 1 shows that maintaining a high positive electrode potential, with respect to the standard hydrogen electrode (SHE), on the positive PbO_2 electrode in an electrochemical apparatus can stabilize lead dioxide. Therefore, lead dioxide instability in acid solutions is easily avoided in continuous electrochemical processes since a relatively high electrical potential is continuously maintained across the positive and negative
25 electrodes. Where the electrochemical process is needed only periodically, it is possible to reduce the rate of the electrochemical process while supplying a lower electrical potential across the positive and negative electrodes, which stabilizes the lead dioxide by maintaining a trickle of electrical current between the electrodes. Unfortunately, continuous electrochemical processes and continuous electrical potentials are not practical in numerous applications, such as residential
30 or consumer products, since power outages and even drained backup batteries can be experienced. Yet another possible solution is to use platinum metal as the anode electrocatalyst, but the penalty for using platinum is a lower ozone yield and higher cost.

WO 02/48431

PCT/US01/48346



Central to the operation of any electrochemical cell is the occurrence of oxidation and reduction reactions that produce or consume electrons. These reactions take place at electrode/solution interfaces, where the electrodes must be good electronic conductors. In operation, a cell is connected to an external load or to an external voltage source, and electrons transfer electric charge between the anode and the cathode through the external circuit. To complete the electric circuit through the cell, an additional mechanism must exist for internal charge transfer. Internal charge transfer is provided by one or more electrolytes, which support charge transfer by ionic conduction. Electrolytes must be poor electronic conductors to prevent internal short-circuiting of the cell.

The simplest electrochemical cell consists of at least two electrodes and one or more electrolytes. The electrode at which the electron producing oxidation reaction occurs is the anode. The electrode at which an electron consuming reduction reaction occurs is called the cathode. The direction of the electron flow in the external circuit is always from anode to cathode.

Electrochemical cells in which a chemical reaction is forced by added AC/DC electrical energy are called electrolytic cells. Electrochemical cells also include fuel cells, which are supplied with fuel to bring about the generation of DC current, and batteries, such as zinc/manganese dioxide.

The electrolyte may be a liquid electrolyte (aqueous or organic solvent, with a dissolved salt, acid or base) or a solid electrolyte, such as a polymer-based ion exchange membrane that can be either a cation exchange membrane (such as a proton exchange membrane, PEM) or an anion exchange membrane. The membrane may also be a ceramic-based membrane, such as yttria-stabilized zirconia which is an O^{2-} ionic conductor.

However, ozone (O_3) may be produced by an electrolytic process, wherein an electric current (normally D.C.) is impressed across electrodes immersed in an electrolyte. The electrolyte includes water that dissociates into its respective elemental species, O_2 and H_2 . Under suitable conditions, the oxygen is also evolved as the O_3 species. The evolution of oxygen and ozone at the anode may be represented as:



WO 02/48431



PCT/US01/48346

Utilization of high overpotentials, such as anode potentials greater than 1.57 Volts, and certain electrocatalyst materials enhance ozone formation at the expense of oxygen evolution. The water oxidation reactions yield protons and electrons which are recombined at the cathode. Electrons are conducted to the cathode via the external electronic circuit. The protons are carried
5 through a solid electrolyte, such as a proton exchange membrane (PEM).

The cathodic reactions may utilize hydrogen formation:



or involve the reduction of oxygen as follows:



Specialized gas diffusion electrodes are required for the oxygen reduction reaction to occur efficiently. The presence of oxygen at the cathode suppresses the hydrogen formation reaction. Furthermore, the oxygen reactions are thermodynamically favored over hydrogen
15 formation. In this manner, the reduction of oxygen to either water or hydrogen peroxide reduces the overall cell voltage below that required to evolve hydrogen.

Therefore, there is a need for an electrochemical cell and methods that support periodic, non-steady state, or discontinuous operation without suffering degradation of materials, including electrocatalysts, or loss of efficiency. It would be desirable if the apparatus and methods did not
20 require operator attention to verify the status of the power supply. It would also be desirable if the apparatus and methods support large amounts of repetitive use at various operating and standby durations and frequencies.

SUMMARY OF THE INVENTION

The present invention provides an electrochemical cell including or comprising a cathode electrode, an anode electrode, an acidic electrolyte, such as an ion exchange membrane, disposed between the anode electrode and the cathode electrode, and a power source for applying a voltage between the anode electrode and the cathode electrode, characterized in that the anode electrode has a layer of lead dioxide electrocatalyst, or other electrocatalyst that is unstable or deactivates
30 in the presence of the electrolyte without applying a voltage, facing the acidic electrolyte, a retractor mechanism being provided which is responsive to one or more predetermined standby

WO 02/48431

PCT/US01/48346

conditions to retract the anode electrode from an initial position in which the lead dioxide electrocatalyst is in contact with the electrolyte to a retracted position in which the lead dioxide electrocatalyst is spaced from the electrolyte. Optionally, the retractor mechanism is a passive retraction mechanism, such as a spring, gravity, hydraulic accumulator, pneumatic accumulator, or combinations thereof. Preferably, the lead dioxide electrocatalyst is β -lead dioxide, α -lead dioxide, or a combination thereof. In one embodiment, the acidic electrolyte is a proton exchange membrane. In another embodiment, the acidic electrolyte is an aqueous solution of a dissolved inorganic acid, a dissolved organic acid, or a mixture thereof.

The one or more standby conditions are selected from a voltage of less than one volt being applied between the first and second electrodes, the expiration of a time period of operation of the cell, an ozone concentration greater than a set point ozone concentration within the cell, no anodic oxygen/ozone evolution reactions occurring, and no current flowing through the cell. Furthermore, the one or more standby conditions may include a contact pressure of less than 10 psig of the anode electrode with the proton exchange membrane. The one or more production conditions are preferably selected from a voltage greater than one volt being applied between the first and second electrodes, the expiration of a time period from termination of operation of the cell, and an ozone concentration less than a set point ozone concentration within the cell.

Optionally, the electrochemical cell may further comprising an actuator for moving the anode electrode from the retracted position back to the initial position in response to one or more production conditions, such as a contact pressure of greater than a setpoint pressure between the anode electrode and the electrolyte. Preferably, the retractor mechanism and the actuator are constituted by a passive device biasing the anode electrode away from the electrolyte and an active mechanism that, in operation, overcomes the biasing effect of the passive device to move the anode electrode into contact with the electrolyte. It is also preferred that the active mechanism receives power from the power source so that when the power source is connected to apply a voltage between the anode electrode and the cathode electrode, the power source provides power to the active mechanism. The invention is characterized in that the lead dioxide maintains its activity during repetitive cycling of the power source.

The electrochemical apparatus may further comprise a pump for delivering water to at least the anode electrode of the electrochemical cell, wherein the means for retracting is a hydraulic actuator that is also in fluid communication with the water. Preferably, the electrolyte, such as an ion exchange membrane, and one of the electrodes, most preferably the cathode, are stationary. Where a lead-dioxide electrocatalyst is used, it may be desirable to include a lead

WO 02/48431

PCT/US01/48346

removal device in fluid communication with the electrochemical cell, wherein the lead removal device contains a material known to bind or adsorb lead ions, particulates or colloidal species. Such lead removal material may be selected from a zeolite, alumina, silica, or mixtures thereof, and may be in powdered or granulated form.

5 In a preferred embodiment, the one or more of the anode and cathode electrodes are retracted out of contact with the electrolyte when no voltage is being applied between the first and second electrodes. The means for retracting the one or more of the anode and cathode electrodes may also include a guide member to align the electrodes.

10 The electrochemical apparatus preferably also has a means for positioning the first and second electrodes in contact with the electrolyte. Preferably, the electrolyte is an ion exchange membrane, the first electrode is coupled to the means for positioning, and the first electrode has an electrocatalyst formed only on surfaces of the first electrode that are disposed to make contact with the ion exchange membrane. In one embodiment, one of the electrodes is stationary and the ion exchange membrane is secured onto the stationary electrode.

15 Exemplary means for positioning are selected from a hydraulic actuator, a pneumatic actuator, manual mechanical means, piezo-electric means, electric motor means, or combinations thereof, and preferably provide a compressive force against the ion exchange membrane generally between 5 psig (34 kN/m²) and 100 psig (689 kN/m²), most preferably greater than 15 psig (103 kN/m²). The apparatus may be designed so that the means for retracting overcomes the means for positioning when the power source is off, or so that the means for positioning overcomes the means for retracting when the power source is on.

20 The present invention also provides a method of operating an electrochemical cell having a cathode electrode, an anode electrode, an acidic electrolyte disposed between the anode electrode and the cathode electrode, and a voltage source coupled between the anode electrode and the cathode electrode, the method comprising the steps of applying a voltage between the anode electrode and the cathode electrode characterized in that the method further comprises the steps of initially moving the anode electrode from a retracted position in which it is spaced from the electrolyte to an operative position in which it is in contact with the electrolyte, and turning the voltage source on before or simultaneously with the engagement of the anode with the electrolyte, the method further comprising a step of retracting the anode electrode out of contact with the acidic electrolyte shortly before or simultaneously with turning off the voltage source. Optionally, the step of retracting the anode electrode out of contact with the acidic electrolyte is affected in response to sensing of one or more predetermined standby conditions. For example,

WO 02/48431

PCT/US01/48346

the one or more standby conditions may be selected from a voltage of less than one volt being applied between the first and second electrodes, expiration of a time period of operation of the cell, an ozone concentration greater than a set point ozone concentration within the cell, no anodic oxygen/ozone evolution reactions occurring, and no current flowing through the cell.

5 Alternatively, the one or more standby conditions include a contact pressure of less than 10 psig of the anode electrode with the proton exchange membrane.

In another embodiment, the engagement of the anode electrode into contact with the electrolyte is effected in response to the sensing of one or more production conditions. The one or more production conditions are selected from a voltage greater than one volt being applied

10 between the first and second electrodes, the expiration of a time period from termination of operation of the cell, and an ozone concentration less than a set point ozone concentration within the cell.

The one or more standby conditions may be selected from, but not limited to, a voltage of less than one Volt being applied between the first and second electrodes, expiration of a time

15 period, an ozone concentration greater than a set point ozone concentration, contact pressure of less than 10 psig (69 N/m²), or combinations thereof. Furthermore, the method may include automatically positioning the one or more of the first and second electrodes into contact with the electrolyte upon one or more production conditions. The one or more production conditions may be selected from a voltage greater than one Volt being applied between the first and second

20 electrodes, expiration of a time period, an ozone concentration less than a setpoint ozone concentration, contact pressure greater than 10 psig (69 N/m²), or combinations thereof.

The preferred electrolyte is a polymer electrolyte membrane, and the step of automatically positioning preferably comprises compressing the one or more of the first and second electrodes against the polymer electrolyte membrane with a compressive force between 5 psig (34 kN/m²)

25 and 100 psig (689 kN/m²), most preferably between 25 psig (172 kN/m²) and 70 psig (483 kN/m²). While the method steps disclosed herein should generally not be limited to taking the steps in a given order, it is important when using a lead dioxide electrocatalyst, to apply a voltage between the first and second electrodes before positioning the one or more of the first and second electrodes into contact with the electrolyte upon one or more production conditions.

30 Electrochemical cells having the foregoing structure may be characterized in that the apparatus further comprises a mechanism to retract the anode electrode out of contact with the electrolyte in response to the absence of a current flowing through the electrochemical cell. Alternatively, electrochemical cells having the foregoing structure may be characterized in that

WO 02/48431

PCT/US01/48346

the apparatus further comprises a passive mechanism biasing the anode electrode away from the electrolyte and an active mechanism which, when operative, overcomes the biasing effect of the passive mechanism to bring the anode electrode into contact with the electrolyte, and optionally wherein the active mechanism is adapted to be actuated when the power source is connected to
5 apply the voltage between the electrodes. In yet another alternative, electrochemical cells having the foregoing structure may be characterized in that the apparatus further comprises a mechanism to retract the anode electrode out of contact with the electrolyte to interrupt a circuit incorporating the cell, thereby placing the cell in a standby condition.

10 BRIEF DESCRIPTION OF THE DRAWINGS

So that the above recited features and advantages of the present invention can be - - understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiments thereof that are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only typical
15 embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

Figure 1 is a potential-pH equilibrium diagram for the system of lead-water at 25°C.

Figure 2 is a single electrochemical cell capable of positioning electrodes into compressed contact with an ion exchange membrane.

20 Figure 3 is an alternative single electrochemical cell having a wave spring to retract an electrode away from the ion exchange membrane when there is no compression.

Figure 4A is an electrochemical cell stack having a bipolar plate between two cells of Figure 3.

Figure 4B is an electrochemical cell stack having two cells with a common cathode.

25 Figure 5A is a schematic side view of an electrochemical cell having an anode coupled to a push rod, wherein an electrical solenoid actuator with a return spring controls the positioning of the push rod.

Figure 5B is a schematic side view of the electrochemical cell of Figure 5A having a separate deionized water reservoir.

30 Figure 5C is a schematic side view of the electrochemical cell of Figure 5B arranged to withdraw the electrode out of contact with a liquid electrolyte.

Figures 6A-F illustrate exemplary means capable of actuating or positioning an electrode to make contact with an electrolyte, the means including an electrical solenoid with spring

WO 02/48431

PCT/US01/48346

retraction (6A), a cam with spring retraction (6B), a hydraulic or pneumatic actuator (6C), a lead screw (6D), rack and pinion (6E), and piezo-electric actuator (6F), respectively.

Figures 7A-B illustrate exemplary means for latching a push rod to secure an electrode in contact with the PEM during the application of electricity.

5 Figure 8 is a schematic side view of an experimental electrochemical cell setup having an adjustable load and load cell for monitoring the cell operation as a function of compression force between the electrode and the PEM.

Figure 9 is a schematic side view of an electrochemical apparatus having a water reservoir and a diaphragm allowing sealed movement of the push rod.

10 Figure 10A is a schematic side view of an alternative electrochemical apparatus having a hydraulically actuated anode.

Figure 10B is a schematic side view of two electrochemical cells/apparatus according to Figure 10A, but having a common cathode therebetween.

15 Figure 11 is a schematic side view of an alternative electrochemical apparatus having a process water reservoir and a pump that delivers process water to the electrochemical cell as well as to an integral hydraulic actuator.

Figure 12 is a schematic side view of the electrochemical apparatus of Figure 11 having the carbon filter and deionization bed relocated to the pump inlet.

20 Figures 13A-C are schematic views of deionization beds arranged to display a color change that indicates the extent to which the beds are spent.

Figure 14 is a schematic side view of an electrochemical apparatus having a separate deionized water reservoir in fluid communication with the anode.

Figures 15A-D are graphs of percent light absorption as a function of time in seconds for electrochemical cells built according to Figure 7 and operated over many repetitive cycles.

25 Figure 16 is a graph of cell voltage as a function of pressure in psi for the electrochemical cell of Figure 8.

Figures 17A-B are graphs of ozone current efficient in percent as a function of time of a period in which the ozone generator is cycled on and off.

30 Figure 18A-C are perspective views of retractable electrodes coupled to a shaft, wherein the electrode has been modified to improve the current distribution/collection across the face of the electrode.

WO 02/48431

PCT/US01/48346

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides electrochemical apparatus and methods that support periodic, non-steady state, or discontinuous operation without suffering degradation of materials, including electrocatalysts, or loss of efficiency. The apparatus and methods do not require operator attention to verify that an electrical potential across the positive and negative electrodes, otherwise referred to as a cell voltage, is continuously applied to the cell. The apparatus and methods support large amounts of repetitive "on"/"off" cycles at various operating and standby durations and frequencies.

The basic structural unit of the electrochemical apparatus is an electrochemical cell. Thus, an electrochemical apparatus can consist of a single electrochemical cell or a plurality of electrochemical cells, either stacked in series in a bipolar filter press configuration or stacked in series and electrically connected in a monopolar format. The structural elements of an electrochemical cell consist of an anode, or positive electrode, separated from a cathode, or negative electrode, by an ionically conducting electrolyte. If the electrolyte is a liquid, a microporous separator may also be placed between the anode and cathode. The positive and negative electrodes are held spaced apart from each other and contained, along with the electrolyte, in a container having walls which provide support and containment for the elements identified. The container also may have a plurality of input and output ports associated with the supply of reactants and withdrawal of products from both the anodic region of the container as well as the cathodic region of the container.

The anodic and cathodic electrodes may consist of a substrate material on which is coated a suitable electrocatalyst layer. However, the electrode substrate material may also function as the electrocatalyst itself. For many electrochemical processes, it is most suitable that the electronically conducting anodic and cathodic electrode substrates should be porous to allow access of liquid or gaseous reactants to the electrocatalyst/electrolyte interface or withdrawal of liquid or gaseous products from the electrocatalyst/electrolyte interface.

Suitable anodic electrode substrates that are capable of withstanding high positive electrode potentials, aggressive electrolytes (concentrated aqueous mineral acids and mineral bases), and highly oxidizing environments (ozone evolution) include porous titanium, porous titanium suboxides (such as that produced by Atraverda Limited under the trademark "EBONEX"), porous platinum, porous tungsten, porous tantalum, porous hafnium, porous niobium, porous zirconium, and combinations thereof. The porous anodic substrates could be in the form of sintered powders or particles, compressed and sintered, or just compressed randomly

WO 02/48431

PCT/US01/48346

oriented fibers, woven or non-woven cloth or mesh, screens, felt materials, highly perforated metal sheets, or metal sheets with microetched holes. In the case of electrochemical ozone evolution, suitable anodic electrocatalyst layers include α -lead dioxide, β -lead dioxide, boron-doped diamond, platinum-tungsten alloys or mixtures, glassy carbon, fluorinated graphite, and platinum.

Suitable cathodic electrode substrates or suitable cathodic electrode backing materials include porous metals selected from stainless steels (in particular, 304 stainless steel and 316 stainless steel), nickel, nickel-chromium alloys, copper, titanium, titanium suboxides, tantalum, hafnium, niobium and zirconium. These cathodic substrates should be porous to allow the supply of liquid or gaseous reactants to the cathodic electrocatalyst/electrolyte interface or withdrawal of liquid or gaseous products from the cathodic electrocatalyst/electrolyte interface. Suitable porous cathodic substrates include sintered powders or particles, compressed and sintered or just compressed randomly oriented fibers, woven or non-woven cloth or mesh, screens, felts, highly perforated metal sheets, or metal sheets with microetched holes. In the case of electrochemical evolution of ozone, a most suitable cathodic electrode substrate or electrode backing material can be derived from porous stainless steel materials. Preferred cathodic electrocatalyst layers include platinum, palladium, gold, iridium, nickel, pyrolyzed carbon-supported cobalt phthalocyanine, graphite or carbon materials, ruthenium oxide, iridium oxide, ruthenium/iridium oxide, ruthenium/iridium/titanium oxide, carbon-supported platinum, carbon-supported palladium, and mixtures thereof.

Alternatively, the cathode may be a gas diffusion cathode, for example comprising a polytetrafluoroethylene-bonded, semi-hydrophobic catalyst layer supported on a hydrophobic gas diffusion layer. In one embodiment of the present invention, the catalyst layer is comprised of a proton exchange polymer, polytetrafluoroethylene polymer and an electrocatalyst selected from platinum, palladium, gold, iridium, nickel, pyrolyzed carbon-supported cobalt phthalocyanine, graphite or carbon materials, ruthenium oxide, iridium oxide, ruthenium/iridium oxide, ruthenium/iridium/titanium oxide, carbon-supported platinum, carbon-supported palladium, and mixtures thereof. The gas diffusion layer has a carbon cloth or carbon paper fiber impregnated with a sintered mass derived from fine carbon powder and a polytetrafluoroethylene emulsion. This and other gas diffusion cathodes are suitable for air depolarization of the cathode, particularly in regard to open cathodes.

Electrolytes that are particularly useful in electrochemical cells comprise aqueous solutions of mineral acids, aqueous solutions of bases, aqueous solutions of salts, or aqueous

WO 02/48431

PCT/US01/48346

solutions of salts combined with either acids or bases. For the electrochemical production of ozone in an electrolytic cell, it is particularly advantageous to use an electrolyte consisting of water and the acids or salts of fluoroanions dissolved therein. The fluoroanion electrolytes are capable of producing high yields of ozone. Fluoroanions and in particular the hexafluoro-anions, are especially preferred.

A particular class of electrolytes suitable for use in accordance with this invention may be any number of ion exchange polymers including polymers with cation exchange groups that are preferably selected from the group consisting of sulfonate, carboxylate, phosphonate, imide, sulfinamide, and sulfonamide groups. Various known cation exchange polymers can be used including polymers and co-polymers of trifluoroethylene, tetrafluoroethylene, styrene-divinylbenzene, α -, β_1 -, β_2 -trifluorostyrene, etc., in which cation exchange groups have been introduced. Polymeric electrolytes for use in accordance with the present invention are preferably highly fluorinated ion-exchange polymers having sulfonate ion exchange groups. "Highly fluorinated" means that at least 90% of the total number of univalent atoms in the polymer are fluorine atoms. Most preferably, the polymer is perfluorinated sulfonic acid. Solid polymer electrolytes based on perfluorinated cation exchange polymers are most suitable for electrochemical ozone evolution. This is because only water, free of dissolved ionic species or suspended inorganic or organic materials, needs to be added to an electrochemical cell. This avoids the degradation of electrochemical cell components by aggressive electrolytes and the entrainment of liquid electrolytes in evolved gaseous ozone.

It is particularly preferred to utilize an ion exchange polymer that is reinforced to improve the integrity and durability of the membrane. In particular, ultra-thin composite membranes below 50 μm in thickness and comprising proton exchange polymers incorporated into an expanded porous polytetrafluoroethylene (PTFE) membrane are suitable for use as the polymer electrolyte in the present invention. Another suitable membrane includes a porous substrate of randomly orientated individual fibres and an ion-conducting polymer embedded within the porous substrate. Other reinforced membranes that are currently available or that will be developed in the future may also be suitable for use in accordance with the invention.

The proton exchange membrane placed between the anode and cathode is made of a polymer material having sulfonate functional groups contained on a fluorinated carbon backbone. Two such materials include a "NAFION" PEM having an equivalent weight of 1100 grams and a Dow experimental PEM (XUS-13204.20) having an equivalent weight of 800 grams. While "NAFION" 105, 115 and 117 will each operate satisfactorily in the present invention, "NAFION"

WO 02/48431

PCT/US01/48346

117 is the preferred "NAFION" product. However, it is anticipated that a sulfonated polymer having a nonfluorinated carbon backbone would be operable according to the present invention. Such a polymer might include polystyrene sulfonate. Additionally, such a material might be coated with a fluorinated material to increase its resistance to chemical attack. It is also anticipated that a proton exchange membrane made of a polymer material having carboxylate functional groups attached to a fluorinated carbon backbone would be operable according to the present invention. Examples include those available from Tokuyama Soda Company under the trademark "NEOSEPT-F", Asahi Glass Company under the trademark "FLEMION", Asahi Chemical Industry Company under the trademark "ACIPLEX-S" and Tosoh Corporation under the trademark "TOSFLEX IE-SA48." Further, polymeric systems based on: perfluoro bis-sulfonimides ($\text{CF}_3 - [\text{CF}_2 \text{SO}_2 \text{NHSO}_2 \text{CF}_2]_n - \text{CF}_3$); perfluoro phosphonic acids, and the corresponding carbocation acids would function satisfactorily as proton exchange membranes according to the present invention. The Dow experimental PEM gives much superior performance than the "NAFION" PEM materials, which are manufactured by duPont. However, "NAFION" has been determined to be better for impregnating platinum electrodes.

A PEM-impregnated gas diffusion electrode can be hot-pressed onto at least one side of a purified proton exchange membrane, using a Carver hot press, to produce a membrane and electrode (M & E) assembly. The hot-pressing procedure involves placing a sandwich structure, consisting of the PEM and a PEM-impregnated gas diffusion electrode at one or both sides of the PEM, between the platens of the press at approximately 100 psi (689 kN/m^2), where the platens having been previously heated to 100 degrees C. After the temperature of the platens has been raised to within a preselected range of between 125 degrees C. and 230 degrees C., a preselected pressure in the range 1,000 psi (6890 kN/m^2), to 50,000 psi ($344,500 \text{ kN/m}^2$) is applied to the membrane and electrode assembly for a period of time varying from 15 seconds to 150 seconds. The hot pressed M & E's should be immediately removed from the hot press.

Preferred conditions for the preparation of M&E assemblies were found to consist of a hot press temperature of 160 degrees C., a hot pressing time of 90 seconds and a hot press pressure in the range 3,000 psi ($20,700 \text{ kN/m}^2$), to 14,000 psi ($96,500 \text{ kN/m}^2$).

Lead dioxide anodes for use in the electrolytic cells of the invention may be prepared by anodic deposition. The choice of anodic substrates on which lead dioxide is deposited are limited since most metals dissolve when deposition is attempted. However, the noble metals, such as titanium, titanium suboxides (such as that produced by Atraverda Limited under the trademark "EBONEX"), platinum, tungsten, tantalum, niobium and hafnium are suitable as substrates for

WO 02/48431

PCT/US01/48346

the anodes. When titanium, tungsten, niobium, hafnium or tantalum are utilized as substrate materials, they are first platinized to eliminate passivation problems sometimes encountered with the uncoated substrates. The platinizing process may include a predeposition chemical etch of the substrate material.

5 Carbon in the form of graphite may be used as a substrate; however, lead dioxide adherence is a particular problem if the carbon has not been thoroughly degassed. The carbon is degassed by boiling in water for some time followed by vacuum drying over a period of days. When degassed, adherence is greatly improved with respect to thermal stress. Vitreous or glassy carbon does not appear to have the adherence problem.

10 Platinum is the most convenient substrate material to work with, gives the most uniform deposits, and does not present any additional problems. Platinum is therefore typically the most suitable substrate material for lead dioxide anodes. However, its high cost may make other previously mentioned substrate materials more practical for commercial use.

15 In any event, lead dioxide is plated onto substrates in a well known plating bath comprising essentially lead nitrate, sodium perchlorate, copper nitrate, and a small amount of sodium fluoride and water. The substrate material is set up as the anode in a plating bath with a pH maintained between 2 and 4. Current densities of between 10 and 400 milliamperes per square centimeter give bright, smooth and adherent lead dioxide deposits. Bath temperature is maintained at temperature in the range between 20 degrees C. and 70 degrees C. at all times
20 during deposition. The deposition may be carried out with vigorous stirring of the electrolyte and rapid mechanical vibration of the anode to give consistently fine granular deposits free from pinholes or nodules. A surface-active agent may be added to the plating solution to reduce the likelihood of gas bubbles sticking to the anode surface.

25 A particularly suitable anodic electrode substrate and anodic electrocatalyst for the electrochemical evolution of ozone, using either aqueous electrolytes or solid polymer electrolytes based on cation exchange polymers, is porous titanium coated with a layer of β -lead dioxide. To enhance the adhesion of the β -lead dioxide layer on the porous titanium substrate it has been found that the porous titanium substrate should be suitably cleaned and chemically etched followed by the deposition of a thin layer, or a flash coating, of metallic platinum on the
30 porous titanium substrate immediately prior to the electrodeposition of the β -lead dioxide electrocatalyst layer. However, in experimental work carried out by the inventors, it was found that the nature of the porous titanium substrate has a remarkable effect on the electrochemical

WO 02/48431

PCT/US01/48346

ozone generation efficiency and the lifetime of an electrochemical cell for ozone evolution when a solid polymer electrolyte based on a cation exchange polymer membrane, such as perfluorosulfonic acid, is used as the electrolyte.

The Retractable Electrode

5

The invention provides a means for positioning one or more electrodes into contact with electrolyte and means for retracting the one or more electrodes out of contact with the electrolyte. In a single electrochemical cell apparatus, it is preferred to have only one mobile electrode, i.e., one positionable and retractable electrode, and one stationary electrode.

10

The means for positioning and means for retracting may be the same device or different devices. It is preferred that the means for positioning/retracting is designed to retract upon a given shutdown condition, such as a voltage of less than one Volt being applied between the first and second electrodes, expiration of a time period, an ozone concentration greater than a setpoint ozone concentration, contact pressure of less than 5 psig (34.5 kN/m²), and combinations thereof.

15

Alternatively, the means for positioning/retracting may be designed to position the one or more electrodes into contact with the electrolyte upon a given production condition, such as a voltage greater than one Volt being applied between the first and second electrodes, expiration of a time period, an ozone concentration less than a setpoint ozone concentration, contact pressure greater than 5 psig (34.5 kN/m²), and combinations thereof.

20

Using a lead dioxide anodic electrocatalyst, it is critically important to prevent the lead dioxide from contacting the acidic environment of the electrolyte while the electrical potential is off. In accordance with the present invention, there are three suitable modes of startup and shutdown. First, the anode must be retracted prior to removing the applied potential, and a suitable potential must be applied prior to contacting the anode to the electrolyte. For example, the voltage may be applied for 30 seconds before the anode initiates contact with the electrolyte and/or applied for 30 seconds following the anode being retracted out of contact with the electrolyte. Second, the voltage may be turned off at the same time as the anode and electrolyte are being separated. Third, the applied electrical potential may be kept "on", wherein the contacting and retracting of the anode from the electrolyte may act as a switch for turning the current "on" and "off".

30

In accordance with the invention, it is also useful to provide special startup and shutdown procedures that avoid abrupt changes in the power applied. Accordingly, the procedure may include gradual ramping or incrementally stepping the power between a present value and a target

WO 02/48431

PCT/US01/48346

value. Such gradual or incremental increases or decreases in power may be utilized each time the cell is cycled "on" and "off". For instance, the current density through the cell may be stepped several times from 0.15 Amps per square centimeter to eventually arrive at a final current of 3 Amps per square centimeter. Furthermore, a special "initial startup" profile may be followed during the cell's first use in order to accommodate certain one-time changes in cell conditions from their shipment and storage condition to a fully operational condition, such as the wetting of the membrane that must occur during a first use. In a preferred embodiment, the power may be adjusted so that the cell voltage remains within a given range of voltages most preferably between 3 volts and 8 volts.

While the means for positioning and the means for retracting may be active, passive or a combination of active and passive, it is preferred that the means for retracting is passive and the means for positioning is active. The term "active", as used herein, means that a continuous application of an outside force (electrical, hydraulic, pneumatic, piezoelectric) is necessary to secure the condition or position of the device. For example, an electrical solenoid is an active device because a push rod connected to the solenoid is urged to a desired condition only while electrical power is maintained to the solenoid. The term "passive", as used herein, means that the condition or position of the device will be maintained unless acted upon by an outside force. For example, a wave spring or coil spring is a passive device because a push rod connected to the spring is urged to a desired condition unless the spring is overcome by an opposite outside force. The term "fail-safe", as used herein, refers to the condition or position that a device takes upon a particular failure, such as a loss of electricity.

In a preferred embodiment of the invention, the means for retracting is passive. Passive retraction is accomplished by providing a mechanical stored energy device that maintains a bias on the actuated electrode toward the retracted condition or position, so that retraction occurs automatically upon releasing the actuation force. The mechanical stored energy device may be a spring, a pressurized fluid container, weight, and combinations thereof. In this manner, failure or shutdown of the electrochemical apparatus causes retraction of the electrode.

While positioning and retracting the one or more electrodes are generally directly opposite movements controlled by a guide member, the one or more electrodes may follow any of a number of paths. While the preferred path is a linear path having a guide member that allows only translational movement of the one or more electrodes, it is also possible to use an arcuate path having a guide member that allows only hinged movement of the one or more electrodes. Regardless of the exact direction of the path or the type of guide member involved, it is important

WO 02/48431

PCT/US01/48346

that the one or more electrodes be positioned to maintain operation of the entire active area of the cell, namely maintain the electrode in full face contact with the PEM and generally opposite the active area of any opposing electrodes.

5 The guide member(s) may be provided in various forms, including those that guide the push rod and those that guide the electrode itself. Furthermore, the guides may be disposed through or around the electrode or push rod, or consist only of a rigid connection with the positioning means. In addition to providing alignment of the electrodes and PEM, it is preferred that the guide member limit rotational and lateral movement of the electrode relative to the face of the PEM. Rotational and lateral movement are undesirable not only because of potential physical damage to the PEM or electrocatalyst, but also because consistent re-alignment of the electrocatalyst and PEM from one operating cycle to the next allow any physical variation in the electrocatalyst and PEM surfaces to conform to each other as they do in a traditional cell where the electrocatalyst and PEM are in constant compression. Consistent re-alignment of the electrocatalyst coated substrate and PEM from one operating cycle to the next is preferred in accordance with the present invention.

10 The electrolyte used in the electrochemical apparatus of the present invention may be either a liquid electrolyte or a solid electrolyte (otherwise referred to as an ion exchange membrane), such as a PEM. Ion exchange membranes are preferred, because liquid electrolytes must be maintained separate from the process water. While an electrochemical cell will function with the electrodes merely contacting the membrane, it is preferred to support the membrane on one of the electrodes. This support may include securing the membrane to be stationary with respect to one of the electrodes or directly bonding or casting the membrane onto one of the electrodes. An example of a suitable bonding procedure includes heating a perfluorinated sulfonic acid polymer membrane to about 160°C under a pressure of up to 300 psi (2067 kN/m²), preferably for about 90 seconds. When using a lead dioxide anodic electrocatalyst, the ion exchange membrane is secured to the cathode.

20 The cathode may be open to the air and have no direct supply of water. Such a cathode may be suitable for air depolarization as well as evaporative disposal of both the electroosmotic water and any product water. However, since the membrane must be kept wet or moist in order to be ionically conducting, a source of water must be provided to the membrane. Optionally, water may be provided from the anode side, either as liquid water or water vapor. Further, water may be provided from the cathode side for back diffusion into the membrane, either as liquid water (no air depolarization) or water vapor. Even further, water may be provided to an edge or

WO 02/48431

PCT/US01/48346

other exposed area of the membrane so as to "wick" or absorb water into the membrane. Particularly in applications where water of sufficient quality is scarce, it is anticipated that the hydration state of the membrane may be controlled or limited to make more efficient use of water while accepting a reduction in the ionic conductivity of the membrane. Where the amount of water being supplied to the membrane is limited, electroosmotic water and product water at the cathode will be absorbed (back diffused) into the membrane.

While much of the description and drawings of the present invention refer to a single cell, the invention encompasses multiple cell arrangements, including both stacks of cells and side-by-side arrays of cells. It should be recognized that both stacks and side-by-side arrays can be electronically coupled in either a parallel or series circuit depending upon the arrangement of electronic conductors and insulators. However, the configuration of a plurality of cells in a side-by-side array may include a plurality of cells in the same plane, a plurality of cells in two or more parallel planes, and a plurality of cells along a curvilinear surface.

The electrolytic cells may generate gas at any concentration, but the gas concentration preferably comprises between about 1% and about 18% by weight ozone in oxygen. A fully passive electrolytic cell for producing ozone is most preferred for small scale point-of-use applications such as point-of-use water treatment or built into equipment requiring ozone for sterilizing, disinfecting, decontaminating, washing, etc. The limited number of moving parts reduces the initial cost of the device and also reduces the potential for failure and maintenance requirements of the device.

In the description of the Figures that follow, like numerals may be used to refer to like elements among the Figures. The use of like numerals for like elements means that the like elements have the same general name and function, but like elements may have more or fewer features in one Figure than the same element in another Figure. The use of like numerals is intended to more clearly describe the common elements of the embodiments as they appear from Figure to Figure, and a particular use of like numerals should not be taken as limiting the scope of the invention to specific features unless the description expressly states such limitations.

Figure 2 is an exploded view of a single electrochemical cell 10 capable of positioning two electrodes into compressed contact with an ion exchange membrane. The cell 10 comprises an electronically conducting anode substrate 12 having an anodic electrocatalyst 14 formed on the surface facing the PEM 16. However, the anode substrate may also function as both substrate and electrocatalyst. An electronically conducting cathode substrate 18 has a cathodic electrocatalyst 20 formed on the surface facing the PEM 16. However, the cathode substrate may also function

WO 02/48431

PCT/US01/48346

as both substrate and electrocatalyst. The anode substrate 12, cathode substrate 18 and PEM 16 are secured together by an electrically nonconducting bolt 22 and nut 24. A power supply 26 has a positive terminal 28 and a negative terminal 29 placed in electronic communication with the anode substrate 12 and cathode substrate 18 via electronic conductors, respectively. The power supply applies the necessary electrical potential (Volts) to drive the electrochemical process. In one embodiment of the invention, the cell 10 is submersed in water so that water is provided to and electrolyzed at the anodic electrocatalyst to form a mixture of ozone/oxygen gas and water is provided directly or indirectly to the PEM to support proton conductivity. Hydrogen gas or other cathodic product(s) is formed at the cathodic electrocatalyst.

The anode and cathode substrates are electronically conducting metal or ceramic particles or fibers that yield a porous substrate usually in the form of a disc, square or rectangle. Exemplary substrates include, but are not limited to, woven felt, sintered metal, metal screens, metal meshes, fabrics and the like.

Figure 3 is an exploded view of an alternative single electrochemical cell 30 having a separation spring 32, such as a wave spring or wavy washer, to retract the anode substrate/electrocatalyst 12, 14 away from the ion exchange membrane 16 when the compression is relaxed, such as when the nut 24 is threaded away from the head of the bolt 22. The anode substrate 12 preferably has a recess 34 to receive the compressed wave spring during operation and to maintain alignment (centering) of the wave spring with the anode substrate 12 so that the substrate 12 will be pushed away from contact with the PEM 16. In applications where it is important to minimize the retraction distance, it is beneficial to retract the substrate 12 an equal distance at all points over the substrate surface, such as with a substantially translational movement.

While the retraction or separation distance may be any distance at which the one or more electrodes are moved out of contact with the PEM, a controlled translational retraction can allow very small retraction distances dependent upon the dimensional tolerances of the actuator and guide member, typically on the order of 1-5 millimeters, but certainly retractions of more than 5 millimeters and less than 1 millimeter are possible. While the present invention does not reside in any particular separation distance, reference to a separation of "up to" a certain distance must avoid contact between the separated components, but may be as close as possible given dimensional tolerances of the relevant parts.

The term "retraction", as used herein, means movement that causes separation of components. The term "actuation", as use herein, means movement that causes contact between

WO 02/48431

PCT/US01/48346

components. Neither "retraction" nor "actuation" should be taken to imply whether a pushing or pulling force is used to accomplish the separating or contacting movement unless such pushing or pulling is expressly stated. In general, where the Figures show retraction accomplished by a pushing force, it should be recognized that a pulling force could be easily adapted to accomplish the same movement. However, where springs are involved, as shown in numerous Figures herein, it is preferred, but not required, that the springs be placed in compression rather than tension.

Figure 4A is an exploded view of an electrochemical cell stack 40 having a bipolar plate 42 disposed between two cells, such as a pair of cells 30 from Figure 3. In the manner shown, even a stack of cells can include a passive retraction mechanism (for example, one wave spring 32 per cell) and an active actuation mechanism (for example, a bolt 22/nut 24 combination). As shown in Figures 2-4, the bolt 22 also serves the function of a guide member that maintains alignment of the components.

Figure 4B is an electrochemical cell stack 41 having two cells 43 with a common cathode substrate 18 coupled to the negative terminal of a power source. The two cells 43 are mirror images, but in other respects the stack 41 is the same as the stack 40 of Figure 4A. It is also possible to operate a cell having a common anode and two cathodes.

Figure 5A is a schematic side view of an electrochemical apparatus 90 having an anode substrate 12/electrocatalyst 14 coupled to a push rod 48, wherein the positioning of the push rod is controlled by an electrical solenoid actuator 92 to compress the anode substrate 12/electrocatalyst 14 against the PEM 16 and a return spring 46 to retract the anode. The cathode substrate 18/cathodic electrocatalyst 20/PEM 16 assembly as well as the solenoid actuator 92 are secured in a fixed relationship, such as by securing to a common housing 96, so that movement of the anode is achieved relative to the cathode/PEM simply by activating the actuator. The cell is shown submersed in water 98 while the solenoid 92 is positioned out of the water. As used in the examples below, a controller 94 is connected in the electronic circuit to provide power to the solenoid 92. The controller 94 may operate the apparatus 90 in any number of ways based on a variety of conditions, such as a simple timer specifying the "on" duration and frequency.

Figure 5B is a schematic side view of the electrochemical apparatus 90 of Figure 7A having a separate deionized water reservoir 91 that is preferably prepackaged deionized water. The water reservoir 91 is provided in fluid communication with the housing 96 through a conduit 93. The water reservoir 91 preferably contains deionized water to provide high quality water to the apparatus and to eliminate the need to incorporate filtration and deionization devices into the

WO 02/48431

PCT/US01/48346

apparatus. The water level in the reservoir 91 is controlled within certain limits, since the reservoir 91 will add water to the housing 96 whenever the water level in the housing 96 falls below the level of the inlet conduit 93 to allow a gas bubble to pass into the housing 91. The headspace 95 above the water level allows phase separation of the ozone/oxygen gas from the water 98 so that the ozone/oxygen gas can then pass through the ozone output 97, preferably having a valve (not shown) to regulate the withdrawal of gas and/or maintain a backpressure.

Figure 5C is a schematic side view of the electrochemical apparatus 90 of Figure 5B arranged to withdraw the electrode 12 out of contact with a liquid electrolyte 101. The apparatus is the same as in Figure 5B except that the ion exchange membrane 16 has been replaced by a liquid electrolyte 101 and that the conduit 93 communicates with the housing 96 to maintain the electrolyte level over the cathode 18, yet low enough that the anode 12 can be retracted out of contact with the electrolyte. Figures 6A-F illustrate exemplary means capable of actuating or positioning an electrode to make contact with electrolyte, the means for positioning including: an electrical solenoid 44 for actuating the push rod 48 upon throwing a switch or receiving a command from a controller 50 in combination with a spring 46 for passively retracting the push rod (Figure 6A); a cam 52 aligned to actuate the push rod 48 having a spring 46 disposed between a retainer 54 and a collar 56 for providing passive retraction of the push rod (Figure 6B); a hydraulic or pneumatic actuator 58 has a push rod 48 coupled to a piston 64, where the actuator 58 includes a motive fluid feed conduit 60 for actuating and a motive fluid return conduit 62 for retracting the piston 64/push rod 48 (Figure 6C); a lead screw 68 push rod 48 and a lead screw motor 66 connected to power source 26 through manual switches or an electronic controller 69 (Figure 6D); a rack 70/push rod 48 and pinion 72 (Figure 6E, motor/power source not shown); and a piezo-electric actuator 74 coupled to the push rod 48 and activated by power source 26 through switch 50 (Figure 6F). Other actuating or positioning devices and variations of the foregoing devices are deemed to be within the scope of the present invention.

Figures 7A-B are schematic diagrams of exemplary devices for latching the push rod 48 in a position that secures an electrode (not shown) in contact with the PEM during the application of electricity. In Figure 7A, the push rod 48 includes a latching notch 76 designed to receive an extendable shaft 78 of a latching solenoid 80 upon application of electricity. In the absence of electrical power or upon the occurrence of some other standby event, such as low cell voltage, the solenoid relaxes and the return spring 81 withdraws the shaft from the notch. If there is no longer an actuating force 82 being applied, then the spring 46 causes retraction of the push rod. In Figure 7B, the push rod 48 is coupled to an electromagnetic armature 83 that can be selectively

WO 02/48431

PCT/US01/48346

secured to an electromagnet coil latch 84 coupled to a power source 26 through a switch 50. Upon releasing the electromagnetic latch 84, the spring 46 causes retraction of the push rod.

In Figures 6A-F and 7A-B it should be appreciated that in order to accomplish movement of the push rod, the elements causing or preventing movement of the push should be secured to the housing or other stationary structure of the electrochemical apparatus.

Figure 8 is a schematic side view of an experimental electrochemical cell setup 100 having an adjustable load, such as a bolt 102 and spring 104, and a load cell 106 for measuring the load and displaying or recording the load with a meter 108. The ozone production efficiency can be monitored as a function of compression force between the electrode and the PEM. It is the compression force per unit area that is believed to be important to optimal cell performance.

Figure 9 is a schematic side view of an electrochemical apparatus 110 having a water reservoir or housing 112 and a sealing member, such as diaphragm 114, allowing fluid-sealed movement of the push rod end 48a coupled to the positioning member 116 that is isolated from the water and the push rod end 48b coupled to the anode 12. Optionally, the sealing member may be piston rings, shaft seals and the like.

As shown, the cathode 18 and PEM 16 are stationarily secured at the top and bottom to floor 118 and interior wall 120 portions of the housing 112. The anode 12 is maintained in alignment with the cathode/PEM by a guide member comprising the surfaces 122, 124, which are preferably circumferential about the anode 12. The apparatus 110 is also shown having an anode chamber 126 isolated from a cathode chamber 128. One benefit of the isolation is the separation of the anode gas(es) from the cathode gas(es). However, as a consequence of the isolation and the electroosmotic flow of water from the anode to the cathode, it is beneficial to have a conduit 129 in the apparatus 110 to allow the return of water from the cathode chamber 128 to the anode chamber 126 without mixing the gas(es).

Optionally, the invention provides a unique gas destruct system that can destruct waste hydrogen and/or ozone. The hydrogen is mixed with oxygen (or air) and passed over a hydrogen destruction catalyst producing heat. The hot gases, including excess oxygen may then be combined with waste ozone and passed downstream over an ozone destruction catalyst. Since the ozone generator continuously produces hydrogen, the heat from the hydrogen destruction maintains the ozone catalyst at elevated temperatures to make the catalyst more active and to continuously dry the ozone destruct. In this manner, the ozone destruct catalyst is maintained in a ready state for the destruction of ozone. Alternatively, the hydrogen destruct can provide high-grade heat that may be used in other, unrelated processes, such as domestic hot water heating.

WO 02/48431

PCT/US01/48346

Figure 10A is a schematic side view of an alternative electrochemical cell or apparatus 130 having a hydraulically actuated anode, wherein the motive fluid may be the process water or another fluid. The anode 12 is coupled to the push rod 48 that has a piston 132 on the opposing end. The piston 132 is actuated by a fluid entering the piston headspace 134 to compress the return spring 136 and position the anode into compressed contact with the PEM 16. The apparatus has an optional diaphragm 138 attached around the push rod 48 to maintain isolation of the process water, which enters through the passage 140 and exits with gases produced through passage 142, from the motive fluid.

The cathode 18 is stationary with the PEM 16 secured to the cathode. Notably, there is no cathode chamber or reservoir around the cathode, but rather the cathode is open to the air and may be referred to as "dry". The open or exposed cathode may be suitable for air depolarization as well as evaporative disposal of both the electroosmotic water and any product water. Accordingly, there is no direct supply of water to the cathode.

Figure 10B is a schematic side view of two electrochemical cells/apparatus according to Figure 10A, but having a common cathode therebetween. The common cathode 18 is coupled to a power source 26 as in Figure 4B. However, the apparatus of Figure 10B has two mobile anodes 12 coupled to two means for positioning and retracting, which operate the same as the individual means of Figure 10A. The two means may be actuated by the same or different motive fluids and may be actuated and retracted at the same or different moments. It is anticipated that the two mobile electrodes may vary from each other in any of a number of characteristics, for example catalyst loading, amount of active area, and types or concentrations of products produced. Optionally, the two electrodes may be operated independently to produce solutions that are optimized for different uses, such as using one anode for producing an 18 weight percent ozone solution for sanitizing countertops and using another anode for producing 2 weight percent ozone to cleanse skin burns.

Figure 11 is a schematic side view of an alternative electrochemical apparatus 150 having a process water reservoir 152 and a pump 154 that delivers process water 153 to the electrochemical cell (anode substrate 12, PEM 16, cathode substrate 18) as well as to an integral hydraulic actuator. The hydraulic actuator is similar to that of Figure 10, except that the piston 132 is actuated with the process water 153. The apparatus is also provided with a filter 154, preferably a carbon filter, to remove, among other things, particulates, dissolved organic compounds and heavy metals (also acting as an ozone destruct catalyst), a flow controller 156 (such as a flow restricting orifice), a deionization resin bed 158 to remove dissolved ions from

WO 02/48431

PCT/US01/48346

the process water 153, a lead removing unit 160 (such as a column of zeolite, alumina, silica or other materials known to bind or adsorb lead ions and particulate or colloidal lead species), a venturi 162, and a backpressure control orifice 164. It should be recognized that the order of the filter 154, flow controller 156 and deionization resin bed 158 is not restricted.

5 In operation, water 153 from the reservoir 152 is provided to the inlet of pump 154 through a reservoir discharge conduit 165. The pump discharge conduit 166 provides high-pressure water for delivery to the piston motive fluid chamber 134 or through the venturi 162 and backpressure control orifice 164 back to the reservoir 152. The high pressure process water actuates the piston as in Figure 10, but then the process water passes through the carbon filter,
10 flow controller and deionization resin bed on its way to the anode chamber. The deionized water supports electrolysis at the anode 12 as well as proton conductivity through the PEM 16 to the cathode 18. The electroosmotic water passing to the cathode 18 may be recycled or discarded (i.e., dumped into a drain or allowed to evaporate). However, the water that is not used in the anode becomes ozonated and the water escapes the anode chamber along with the ozone/oxygen
15 gas stream through discharge conduit 167 and passes through the lead removal unit 160. Downstream of the lead removal unit 160 the ozonated water and the ozone/oxygen gas stream are drawn into the venturi and returned to the reservoir 152 where the concentration of ozone is allowed to increase.

The startup of an electrochemical apparatus, such as the apparatus 150 of Figure 11, may
20 proceed in many ways, but it is preferred that the startup include: (1) introducing process water into the water reservoir, (2) applying a voltage between the first and second electrodes, (3) turning on the water pump, and (4) positioning the mobile electrode into contact with the electrolyte, most preferably in the order stated.

Figure 12 is a schematic side view of the electrochemical apparatus 150 of Figure 11
25 having the carbon filter 154 and deionization bed 158 relocated to the reservoir discharge conduit 165. Also, the flow control orifice 156 is left between the motive fluid chamber 134 and the anode chamber in order to maintain or enhance the pressure differential acting upon the piston 132. It is also shown that the return spring 136 can be disposed in tension.

Figures 13A-C are schematic views of deionization beds arranged to outwardly display a
30 color change that indicates to individual users of the device the extent to which the beds are exhausted. Suitable deionization materials that change color upon exchanging ions include MBD-12 and MBD-30 Self Indicating Mixed Bed Resins (available from Resintech, Inc. of Cherry Hill, New Jersey) and IONAC NM-65 Indicator Mixed Bed Resin (available from Sybron

WO 02/48431

PCT/US01/48346

Chemicals Inc. of Birmingham, New Jersey). Such color changes may be due to the presence of an indicator dye in, on or around the deionization materials. While many arrangements of a deionization bed adjacent a clear sight glass are possible, it is preferred that the deionization bed form an elongated column having a high aspect ratio (i.e., a length many times the width). In this manner, the deionization materials closest to the column inlet exchange ions first and the material downstream will not be significantly used until the material upstream of it is fully exchanged. Therefore, there is a fairly distinct region of the column that is carrying out the deionization at any one time and this region propagates along the length of the column as the material gets used. Since a deionization material with a color change indicator is used, there is a color change that propagates along the column. By arranging the column in a manner where a plurality of serially spaced apart segments of the column pass under a sight glass, a display can be provided that allows a rapid indication of use. Preferably, the sight glass is marked with a "replace deionizing bed" instruction adjacent one of the later column segments viewable through the sight glass. While the foregoing arrangement has been described with regard to a deionization bed, a similar arrangement, color indicator and sight glass may be used to prepare a lead removal unit.

In Figure 13A, a side view shows that the deionization column 170 is arranged in an elongated serpentine pattern having an inlet 172, an outlet 174, deionization material 176 disposed there between, and a sight glass 178 adjacent one end of the serpentine. Figure 13B is an end view of the column 170 showing the display formed by the sight glasses. For example, an individual user would quickly notice that the present column was two-fifths spent and that the column should be replaced when the column becomes four-fifths spent in order to prevent breakthrough of ions that could then reach and damage the electrocatalysts or the PEM. While the display is shown as a segmented array of sight glasses it is equally suitable to have a continuous sight glass along the end. Figure 13C is a side view of an alternative column arranged in an spiraling pattern having an inlet 172, an outlet 174, deionization material 176, and a sight glass 178 extending over downstream segments of the column. While the segments here do not represent equal fractions of the column, the display is still effective to instruct the individual user when to change out the column with a new column.

Figure 14 is a schematic side view of an electrochemical apparatus using deionized water from a reservoir 91 rather than using process water from reservoir 152. As with Figures 7B-C, the use of prepackaged deionized water 91 eliminates the threat of contaminating the anode and PEM such that filtration and deionization devices are not needed within the apparatus. Here, the process water 153 is pressurized by pump 154 and delivered to the back of the piston 132 for

WO 02/48431

PCT/US01/48346

actuating the mobile electrode and through the venturi 162 to draw ozone gas into the process water. Preferably, the anode chamber is arranged with the water conduit 93 such that the level of deionized water remains below the ozone exit port 169. It is also preferred that the anode chamber have sufficient headspace to allow for phase separation of the ozone/oxygen gas from the water, such that only the gas phase is drawn through port 169 to the venturi 162. A seal or diaphragm is provided around the push rod 48 to prevent passage of the pressurized process fluid acting upon the piston from getting into the anode chamber. As shown, the diaphragm 171 defines the upper limit of the anode chamber.

Figures 18A-C are perspective views of retractable electrodes coupled to a shaft, wherein the electrode has been modified to improve the current distribution/collection across the face of the electrode. Figure 18A illustrates an electrode 200 having a set of electronically conducting ribs 206, preferably metal, that are formed into a radial pattern on the back surface of the anode substrate 204 in order to improve current distribution or collection from the electronically conducting shaft 202 across the face of the electrode substrate 204. This design improves current distribution without blocking the surface area of the anode substrate or increasing the thickness of the porous anode substrate. Figure 18B illustrates an electrode 210 having a set of fully embedded electronically conducting members 208 disposed radially from the shaft 202. In both Figures 18A and 18B, the electronically conducting members 206, 208 are formed within the porous substrate 204. Preferably, the electronically conducting members are disposed within a metal powder and pressed together under substantial pressure to form a "green body." The green body is then transferred into a furnace for sintering the substrate 204. Figure 18C illustrates an electrode 220 having a less preferred conical substrate 224 coupled to the shaft 222, wherein the increased thickness of the substrate increases the current distribution or collection across the face of the anode. Unfortunately, the increased thickness also increases the distance that anode reactants and products must diffuse.

Example 1

Porous titanium substrates, namely pieces of a woven titanium cloth (150 x 150 per inch, clean, 0.0027" wire diameter, twill weave, 35.4% open area; Unique Wire Weave, Hillside, NJ 07205), were pretreated and subsequently electroplated with β -lead dioxide. A number of these β -lead dioxide-coated titanium cloths were used in an electrochemical cell incorporating a commercially available proton exchange polymer membrane (sold under the trade name Nafion®, by E.I. du Pont de Nemours and Company, Wilmington, DE 19898), which is a

PCT/US01/48346

WO 02/48431

perfluorosulfonic acid solid polymer electrolyte. In some cases, the β -lead dioxide-coated titanium cloths were mechanically pressed against one side of a proton exchange membrane sample simply by means of clamping together the endplates of the electrochemical cell. In other cases, the β -lead dioxide-coated titanium cloths were hot pressed onto one side of similar samples of a proton exchange membrane. Hot pressing involved placing a sandwich structure, consisting of the cation exchange membrane, the β -lead dioxide-coated titanium cloth anode electrode, and a platinum-supported carbon catalyzed carbon cloth gas diffusion electrode on either side of the membrane between the platens of a hot press preheated to 100°C and pressing at approximately 100 psi. The temperature of the platens was then raised to 120°C and a pressure of 2,500 psi was applied for 90 seconds.

On testing the performance of electrochemical cells containing β -lead dioxide-coated titanium cloth electrodes bonded to cation exchange polymer membranes by either method, it was found that the ozone gas content in the evolved ozone/oxygen gas stream decreased from an initially high value of 12-15 wt% to a value of the order of 1-2 wt% over a period of time of the order of 12-24 hours. Further, cell voltages decreased from initially high values of the order of 4-6 volts to a value of the order of 1-2 volts. In addition, upon dismantling tested electrochemical cells that contained β -lead dioxide-coated titanium cloth as the anode substrate/anode electrocatalyst material, the surface of the proton exchange polymer membrane in contact with the β -lead dioxide electrocatalyst layer had regions covered with a milky white liquid substance. The surface of the proton exchange polymer membrane in contact with the platinum-supported carbon cathodic electrocatalyst layer displayed dendritic or fractal-like growths of a material within the membrane.

While the nature of these materials on the surfaces of the proton exchange polymer membranes were not determined, it is proposed that the following processes took place on testing these electrochemical cells for electrochemical ozone evolution. The individual wire strands that made up each woven titanium cloth sample was electroplated with lead dioxide over the entire circumference of the cylindrically shaped wire strands. However, when the β -lead dioxide-coated titanium cloth samples were bonded to the surfaces of proton exchange membrane samples, either by mechanical pressing or clamping the end plates or by hot pressing, only a fraction of the entire surface area of the β -lead dioxide electrocatalyst layer was in contact and embedded into the proton exchange polymer membrane material.

WO 02/48431

PCT/US01/48346

On operating an electrochemical cell containing such an anodic electrode substrate/electrocatalyst layer, parts of the β -lead dioxide electrocatalyst layer not in contact with the proton exchange polymer membrane slowly dissolved in the presence of the highly acidic environment that exists at the anode surface under electrochemical ozone evolution conditions.

5 Some of the dissolved β -lead dioxide, in the form of Pb^{2+} cations, migrated through the cation exchange polymer membrane to the surface of the cathode, under the presence of the applied electric field, where they were reduced to metallic lead atoms. Gradually, build up of atom-upon-atom of lead metal gave rise to a dendritic growth of electrodeposited lead metal from the surface of the cathode through the proton conducting channels that are known to exist in proton
10 exchange polymer membranes to the surface of the anode. Eventually, the proton exchange polymer membrane became a mixed ionic/electronic conductor with increasing electronic conductivity character as the time of electrochemical ozone evolution increased. This accounts for the decrease in cell voltage observed with increasing time of electrolysis.

Because the woven titanium cloth consisted of fine cylindrical titanium wires, subsequent
15 contact of these β -lead dioxide-coated titanium wires with the surface of the proton exchange polymer membrane led to localized point contacts embedded into the surface of the membrane, particularly at points corresponding to the overlap of the woven wires. Thus, although the average current density applied to the electrochemical cells on carrying out the various tests were 1 A cm^{-2} on average, it is very likely that the local real current density applied at the point
20 contacts could be of the order of $5\text{-}10 \text{ A cm}^{-2}$. The combination of heating effects (associated with the high local current density) with the highly oxidizing environment (associated with ozone evolution) gave rise to local degradation of the proton exchange membrane. This is in keeping with the observation of a milky white liquid substance on the surface of the proton exchange polymer membrane in contact with the β -anodic lead dioxide electrocatalyst layer. In all cases,
25 electrochemical tests involving β -lead dioxide-coated titanium cloth anodes were carried out using deionized water circulated between a reservoir and the electrochemical cell, where the temperature of the water was maintained at $30 \pm 3^\circ\text{C}$.

Example 2

30 Another type of porous titanium substrates, namely sintered porous titanium substrates derived from the sintering of regular shaped titanium powders (e.g., spheres) or irregular shaped titanium particles under high temperature and pressure in an inert gas environment and available

WO 02/48431

PCT/US01/48346

from Astro Met, Inc., Cincinnati, OH 45215 (100-80/120 and 100-45/60; 5.5" x 11" x 0.050" sheets) and Mott Corporation, Farmington, CT 06032 (Mott 40 micron and Mott 20 micron), respectively, were used. The sintered porous titanium substrates were pretreated and subsequently electroplated with β -lead dioxide as described above for the titanium cloth samples. The β -lead
5 dioxide-coated sintered porous titanium substrates were mechanically pressed against one side of samples of a proton exchange polymer membrane (Nafion®) on clamping the endplates of an electrochemical cell together. They were tested under identical conditions to those utilized for the β -lead dioxide-coated titanium cloth anodic electrode substrates. The thickness of the porous
10 titanium substrates was in the range 0.040"-0.075" and it was observed that these substrates had very flat parallel surfaces. β -lead dioxide was deposited on only one surface of the sintered porous titanium substrates which formed a uniform coating covering the whole surface of each substrate.

On testing β -lead dioxide-coated sintered porous titanium substrates for electrochemical ozone evolution, it was found that electrochemical cells containing these anodic
15 substrates/electrocatalyst layers could produce ozone at high concentrations of the order of 12 to 15 wt% for seemingly indefinite periods of time, so long as such electrochemical cells remained under compression and an applied current density of 1.0-1.6 A cm⁻² was impressed on the electrodes from an external DC power source. Cell voltages of 3.5-5.5 V were observed on flowing deionized water between the electrochemical cell and a reservoir at a temperature of
20 30±3°C. The unexpected result of the continuous production of high weight percent ozone for an extended period of time is attributed to the fact that the sintered porous titanium substrates have flat planar surfaces. Thus, the β -lead dioxide layer on such surfaces is also flat resulting in all of the exposed surface area of the β -lead dioxide layer being in contact with the surface of the proton exchange polymer membrane, and under electrochemical operating conditions, having a
25 voltage greater than 3.0 V applied across the β -lead dioxide/proton exchange polymer membrane interface. As indicated in Figure 1, under such circumstances, β -lead dioxide should be stable indefinitely.

Example 3

30 β -lead dioxide coated sintered porous titanium substrates were subjected to multiple applied current density "on"/"off" events, leading to a gradual lowering of the ozone current efficiency. For coated substrates that were maintained continuously in compression with the

WO 02/48431

PCT/US01/48346

proton exchange polymer membrane, both in the case when the applied current density was "on" and when the applied current density was "off," the effect of four applied current density "on"/"off" events on the ozone current efficiency for an electrochemical cell initially producing ozone at a current efficiency of 14.5 (corresponding to a concentration of 14.5 wt%) is presented in Figures 17A-B. It was further observed that the dramatic effect of applied current density "on"/"off" events on ozone current efficiency was more pronounced for electrodes having low electrocatalyst loadings of β -lead dioxide. For instance, for β -lead dioxide loadings of 5-10 mg cm⁻², 2-3 applied current density "on"/"off" events reduced the ozone production capability of the electrochemical cell from 10-12 wt% to less than 2 wt%. For an electrode with a β -lead dioxide loading of 80 mg cm⁻², an ozone production capability of the order of 5 wt% was obtained after 9 applied current density "on"/"off" events.

Degradation in ozone production performance as a result of time intervals while no current density is impressed upon the electrodes is suggested by the data presented in Figure 1. This figure clearly shows that for the lead-water system at low electrode potentials, that is, when no anodic current is flowing through the electrode/electrolyte interface, Pb²⁺ ions are the most stable species in acidic environments. Maintaining a β -lead dioxide-coated sintered porous titanium substrate in contact with an acidic proton exchange polymer membrane when no current is flowing through an electrochemical cell will give rise to degradation of the β -lead dioxide electrocatalyst layer which subsequently hinders, or reduces, its ability to evolve ozone gas on reimpressing a current between the β -lead dioxide-coated anode and a cathode.

Under the conditions of no applied electric field, that is, when the current density impressed on the electrodes is turned "off," dissolution/precipitation processes involving PbO₂/Pb²⁺ are likely to take place at the β -lead dioxide/proton exchange polymer membrane interface. In the absence of an applied electric field during current "off" events, there is no driving force for the migration of Pb²⁺ ions into the proton conducting polymer membrane towards the surface of the cathode unlike the situation described above for the β -lead dioxide-coated titanium cloth.

Example 4

An experimental setup was prepared including four electrochemical cells to test whether the removal of β -lead dioxide-coated porous anodic substrates from being in contact with proton conducting polymer membranes, during time intervals when no current is flowing between the

WO 02/48431

PCT/US01/48346

anode and cathode, would significantly increase the lifetime of such electrochemical cells and maintain high ozone production rates when an applied current density is reimpressed on the electrodes after a current "off" event. However, this solution is only applicable to porous anodic substrates that have flat planar surfaces as described above in the second example which involved the use of sintered porous titanium substrates. The proposed solution, which is the basis of the invention disclosed in this patent application, will not be effective in the case of porous anodic substrates that have only portions of the surface area of a layer, or regions of the surface of a layer, of β -lead dioxide anodic electrocatalyst in contact with the proton exchange polymer membrane when the electrocatalyst-coated porous substrate and the membrane are compressed together in an electrochemical cell.

Porous anodic substrates that would be ineffective are those that have a relatively small thickness (less than 0.010" thick) and have a layer of β -lead dioxide electrocatalyst material on a front or first surface, around the entire perimeter of fine wires, on walls of large pores readily accessible to water and on a back or second surface. A representative example of such porous substrates was described above in the first example and involved the use of porous woven titanium cloth. Other ineffective porous substrates would include nonwoven cloths, woven or nonwoven meshes, screens, perforated thin metal sheets, or thin metal sheets with microetched holes. However, if the β -lead dioxide electrocatalyst layer is deposited on only those regions of the surface, segments of the surface or portions of the exposed surface area of woven or nonwoven cloths, woven or nonwoven meshes, screens, perforated thin metal sheets, or thin metal sheets with microetched holes that are in contact with a proton exchange polymer membrane when such plated porous anodic substrates and membrane specimens are under compression in electrochemical cells, then the proposed solution is as effective for these substrates as it is for sintered porous metal or ceramic substrates described in the second example above.

An apparatus and method for retracting a β -lead dioxide-coated porous anodic substrate from making contact with a proton conducting polymer membrane and for subsequently having the ability of placing such a β -lead dioxide-coated porous anodic substrate back in contact with the proton conducting polymer membrane was prepared in accordance with Figure 7. In particular, the apparatus and method of the invention must be capable of retracting all of the exposed surface area of the β -lead dioxide coating on a porous anodic substrate from making contact with a proton exchange polymer membrane specimen in an electrochemical cell during a

WO 02/48431

PCT/US01/48346

current "off" event. Similarly, the apparatus and method of the invention must be capable of placing all of the exposed surface area of the β -lead dioxide coating on a porous anodic substrate in contact with a proton exchange polymer membrane specimen in an electrochemical cell during a current "on" event.

5 The cathode and PEM were stationary with only the porous titanium anode substrate and lead dioxide electrocatalyst coupled to the end of an electrically operated solenoid actuator. The solenoid actuator pushed the anode substrate/electrocatalyst into compressed contact with the PEM and a pair of springs raised the anode substrate/electrocatalyst away from the PEM. A controller was used to control each of the four electrochemical cells at a given duration and
10 frequency of operation. Each of the cells was operated without switching off the power. However, the cells were turned "off" by retracting the anode out of contact with the PEM/cathode, since the non-ionically conducting deionized water effectively provided an open circuit. Cell #1 was operated in a cycle of 1.5 minutes "on" and 1.5 minutes "off". Cell #2 was operated in a cycle of 25 minutes "on" and 10 minutes "off". Cell #3 was operated in a cycle of
15 25 minutes "on" and 2 hours "off". Cell #4 was operated in a cycle of 26 minutes "on" and 24 hours "off". A control cell was operated in which the power was switched off during periods when the anode was retracted, but the results showed no significant difference in performance relative to cells having the power on continuously.

20 The ozone gas concentration produced by each of the four electrochemical cells was measured using an Ocean Optics UV absorption system and software to monitor the absorption of UV light by dissolved ozone in the deionized water surrounding the cell. Figures 15A-D show the light absorbance that was measured periodically after large numbers of operating cycles had been performed for cells 1-4, respectively. The legend in each figure indicates the number of operating cycles at which the dissolved ozone concentration was tested. For each test, the figures
25 plot percentage light absorption as a function of time in seconds for a period of about 1500 seconds. Each of the charts in Figures 15A-D show that very little decline in ozone production occurred despite 62,218; 63,468; 4,826 and 1,412 operating cycles in cells 1-4, respectively.

Example 5

30 An electrochemical cell was prepared in accordance with Figure 8 and the cell voltage was measured as the compression between the electrodes was varied between about 10 psi and about 260 psi. Figure 16 is a graph of the resulting cell voltage as a function of pressure in psi for the electrochemical cell. The graph shows that cell voltage declines rapidly with increasing

WO 02/48431

PCT/US01/48346

pressure up to a pressure of about 50 psi. At pressures above 50 psi, additional pressure produced very little decline in cell voltage.

While the foregoing is directed to the preferred embodiment of the present invention, other and further embodiments of the invention may be devised without departing from the basic
5 scope thereof, and the scope thereof is determined by the claims that follow.

WO 02/48431

PCT/US01/48346

THIS PAGE BLANK (USPTO)